



## 60" Swinging Bench Assembly Instructions

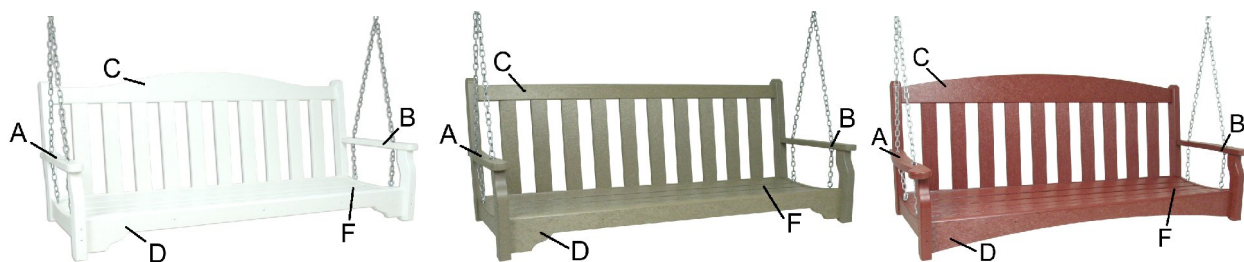

### Tools:

Square Drive Tip (included) with a Power Screwdriver (not included)

### Parts Included:

- A Left End Assembly (1)
- B Right End Assembly (1)
- C Back Assembly (1)
- D Front Seat Rail (1)
- E Under Seat Supports (3)
- F Seat Slats (5)
- G Colored 3" Screws (8)
- H Colored 2.5" Screws (3)
- I Uncolored 2" Screws (15)
- J Colored 1½" Screws (9)
- K Square Drive Tip for Power Screwdriver

### Instructions:

1. Lay Back Assembly (C) on flat surface with screws facing down. Locate pilot holes and attach Left Side Assembly (A) using 3" screws (G).
2. Locate Pilot holes and attach Right Side Assembly (B) using 3" screws.
3. Attach Front Seat Rail (D) with 3" screws. The metal support should be facing the back of the swing.

4. Locate Under Seat Support (E). Place Tenon in hole in Front Seat Rail and slide into groove in Back Assembly.
5. Attach each Under Seat Support to Front Seat Rail with 1½" screw. Attach each Under Seat Support to Back Assembly using 2.5" Screws.
6. Turn swing upright with bottom on floor. Put one end of Seat Slat (F) in joint and flex the slat in order to get other end of slat in joint. Repeat this for all Seat Slats.
7. Tip the swing, facing the back down and attach Seat Slats to Under Seat Supports using 2" Screws (I).
8. Tip swing back up, facing the seat down and attach outer and middle slats to sides using 1½" screws.

\*\*\* Customer is responsible for hanging swing. Be careful to hang swing from a solid structure.